

# DOOR SPRING INSTALLATION P/N 31677

## 1984-1996 CORVETTES


Door spring installation is a simple process. The illustration below shows the driver's side hinge, however the installation is the same for the passenger side. The part of the spring with the flat side is always on the top and faces the front of the car. This spring is longer than the original for ease of installation and will work just fine. **NOTE:** Wear safety glasses and gloves to prevent injury.

Open door and hood to gain access to the door hinge spring.


Remove old spring. (This is done by reversing the install instructions.)

To install-

1. Place the springs shown in View A and slide the end portion with the flat side into the hole on the top of the hinge as far forward as it will go.
2. Move the vertical portion into the recesses as shown in View B using a large flat blade screw driver, twisting the spring toward the body of the car and line up the lower end with the hole in the bottom of the hinge.
3. Use a hammer to tap the bottom of the spring upward until the bottom end enters the hole and the top end portion with the flat side snaps into place.
4. You're done!

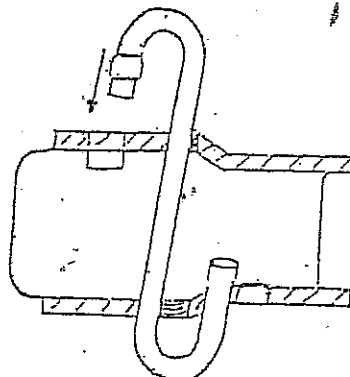

VIEW A

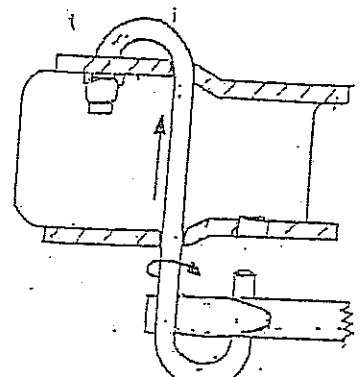

VIEW B

