


Tools Required:  
Lugwrench (19mm) Socket  
22mm Socket



Torque Specifications:  
Caliper Bracket Mounting  
Bolts – 125 ft./lbs.  
Lug Nuts – 100 ft./lbs.

**Step 1:** Jack up car and remove wheel. See Owner's Manual or Service Manual for correct procedure of wheel removal.

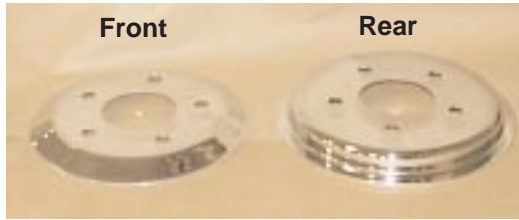

**Step 2:** Remove wheel.



**Step 3:** Loosen top caliper bracket mounting bolt with 22 mm socket, then remove lower caliper bracket mounting bolt.



**Step 4:** Swing caliper out enough to slide hub cover onto rotor. (Do not remove caliper from bracket.)



**Step 5:** Install hub cover to rotor.



**Step 6:** Do the same for installation on rear.



**Step 7:** Finished!