

C5 Hatch Handle Installation Instructions

*Read the entire instructions before proceeding.
The Hatch Handle must be installed correctly before use.*


Parts Included with the C5 Hatch Handle Kit:

- Hatch Handle : P/N 4000015
- Installation Instructions: p/n 8000010

Tools Required:


- Screwdriver or Socket Wrench with Torx™ 30 Bit

1. Open the hatch and locate the right hatch latch.
2. Carefully remove and retain the two Torx™ 30 screws holding the right hatch latch in place with a screwdriver or socket wrench.
3. Align the **HATCH HANDLE** over the right hatch latch as shown.
4. Reinstall the screws making sure screws are tight.
5. Pull down firmly on handle to shut hatch (recommend leaving the driver or passenger door ajar when shutting hatch).
6. Open hatch and inspect installation thoroughly to assure proper latching.

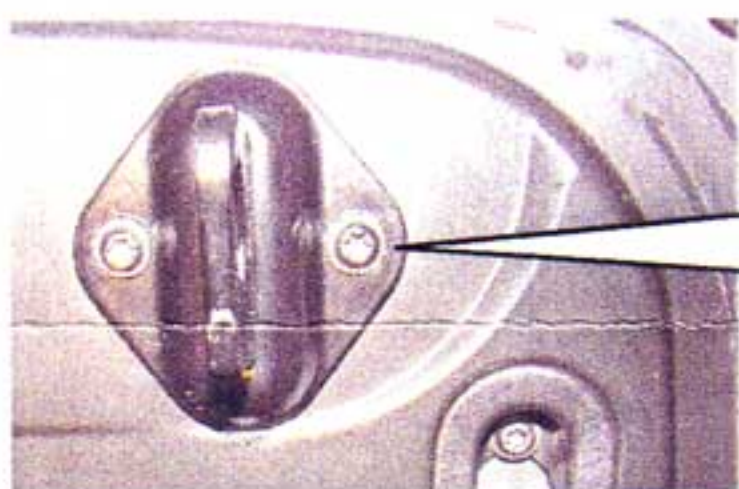

Carefully remove and retain screws from right hatch latch.

Place **HATCH HANDLE** over hatch latch and install screws

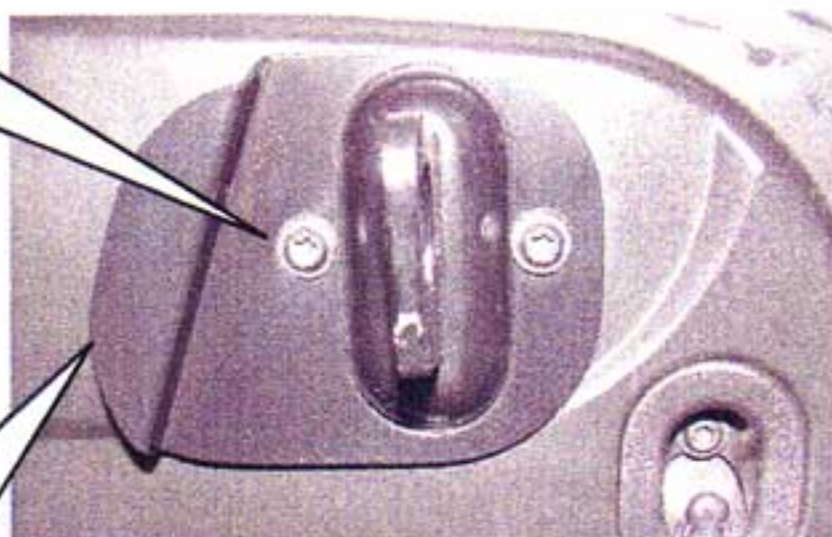

Pull down on **HATCH HANDLE** to shut hatch