

# C5 FENDER STRIPES

1. Included with the fender stripes is a separate stripe. This is an alignment stripe to show where to place the stripes on the car. This stripe will start at the top of the headlight.

2. Spray the work area with application fluid (4 drops detergent to 1 pint of water), then separate the decal from the paper and spray the back (tacky side) of the decal.



3. Apply the alignment stripe starting at the top of headlight as shown. Use a squeegee or a credit card to smooth out the air bubbles.

4. Now spray fender stripes and work area as described in step 2.



5. Move the stripes into position and use a squeegee or a credit card and gently smooth out the air bubbles.

**Read entire instructions before starting!**




6. When the stripes are in place, remove the transfer tape without pulling up the stripes. If the stripes start to come off, squeegee back into place and let decals dry a few minutes longer.

7. The stripes are made long so desired positions can be obtained. Carefully cut off excess with a razor or sharp scissors.



8. Remove alignment stripe.

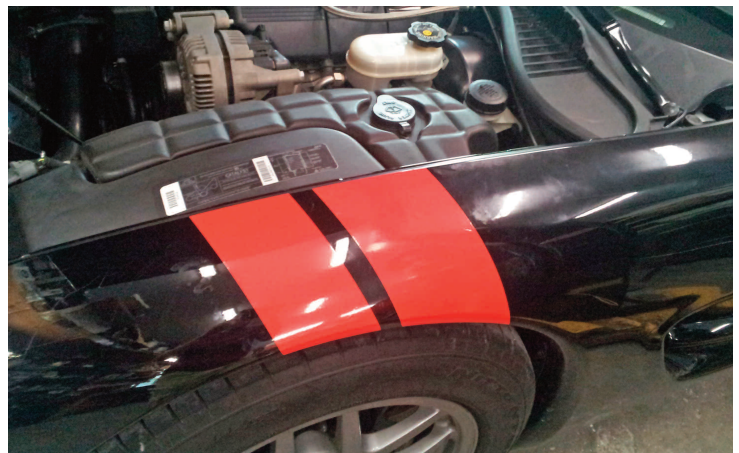

9. Use a squeegee to remove any bubbles of fluid under the decal. If you have some small bubbles that you cannot remove don't worry, the decal does breathe and fluid will evaporate after a couple of days. If it is a must that you have the bubbles removed you can use a pin to puncture the decal and squeeze out the fluid.